



TECHNICAL DATA

External resolution.....1/2,000 (business)
 1/10,000 (normal)

Display.....1.2"LED display

Keyboard.....3 keys mechanical switch

Operate temp.....0 ~ +40

ADC.....sigma delta


ADC update.....1/10 second

Internal counts.....600,000

Rating.....AC adapter(9V/800mA)
 Internal rechargeable battery
 (lead acid 6V/10Ah)

Overload capacity.....150% of rated capacity

Tare range.....100% of capacity

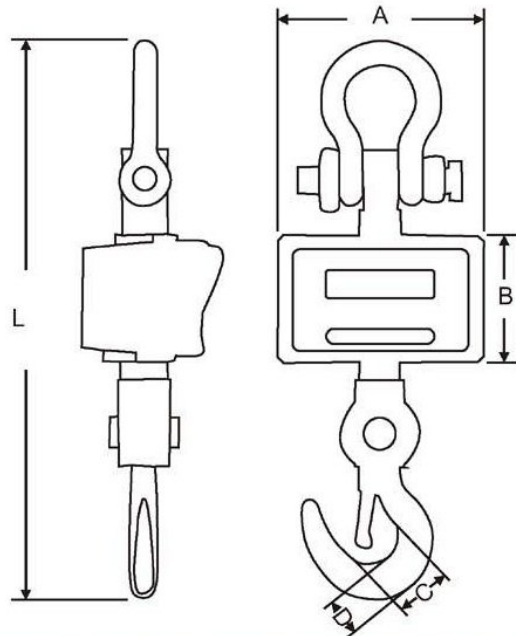

FEATURES

- large LED display
- Rechargeable battery operation
- Programmable to meet your needs
- Change division and reading lock function
- Optional remote controller

| | A | B | C | D | L |
|-------|-----|-----|----|----|-----|
| 1t-3t | 270 | 172 | 50 | 47 | 610 |
| 5t | 297 | 186 | 50 | 50 | 735 |
| 10t | 297 | 186 | 55 | 70 | 845 |

SPECIFICATIONS

| Model | Capacity | Division (normal) | Division(high) |
|----------|----------|-------------------|----------------|
| TM-1000A | 1000kg | 0.2kg | 0.1kg |
| TM-2000A | 2000kg | 0.5kg | 0.2kg |
| TM-3000A | 3000kg | 1kg | 0.5kg |
| TM-5000B | 5000kg | 1kg | 0.5kg |
| TM-7500B | 7500kg | 2kg | 1kg |
| TM-10KB | 10000kg | 2kg | 1kg |